



AiP74AVC1T45

Supply Translating Transceiver;3-state

Product Specification

Specification Revision History:

Version	Date	Description
2022-11-A1	2022-11	New
2024-12-A2	2024-12	Add the package form for XSON6



Contents

1、General Description.....	4
2、Block Diagram And Pin Description	5
2.1、Block Diagram	5
2.2、Pin Configurations.....	5
2.3、Pin Description.....	5
2.4、Function Table.....	6
3、Electrical Parameter	6
3.1、Absolute Maximum Ratings.....	6
3.2、Recommended Operating Conditions.....	6
3.3、Electrical Characteristics.....	7
3.3.1、DC Characteristics 1.....	7
3.3.2、DC Characteristics 2.....	7
3.3.3、DC Characteristics 3.....	9
3.3.4、AC Characteristics 1.....	10
3.3.5、AC Characteristics 2.....	11
3.3.6、AC Characteristics 3.....	11
3.3.7、AC Characteristics 4.....	12
4、Testing Circuit	13
4.1、AC Testing Circuit	13
4.2、Test Data	13
4.3、AC Testing Waveforms.....	14
4.4、Measurement Points	14
5、Typical Application Circuit And Application Note.....	15
5.1、Unidirectional Logic Level-shifting Application	15
5.2、Bidirectional logic level-shifting application	15
6、Package Information	16
6.1、SOT23-6.....	16
6.2、SOT363	17
5.3、XSON6(1*1*0.45-0.35).....	18
7、Statements And Notes	19
7.1、The name and content of Hazardous substances or Elements in the product.....	19



i-core



1、General Description

The AiP74AVC1T45 is a single bit, dual supply transceiver with 3-state output that enables bidirectional level translation. The device suitable for translating between any of the low voltage nodes (0.8V, 1.2V, 1.5V, 1.8V, 2.5V and 3.3V).

Features:

- Wide supply voltage range:
 $V_{CC(A)}$: 0.8V to 3.6V
 $V_{CC(B)}$: 0.8V to 3.6V
- Inputs accept voltages up to 3.6V
- High-impedance when $V_{CC(A)}$ or $V_{CC(B)}$ =0V
- Specified from -40°C to +125°C
- Packaging information: SOT23-6/SOT363/XSON6

Ordering Information:

Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74AVC1T45GB236.TR	SOT23-6	DYXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.9mm×1.6mm Pin spacing: 0.95mm
AiP74AVC1T45GC363.TR	SOT363	DYXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.1mm×1.3mm Pin spacing: 0.65mm
AiP74AVC1T45ED6.TR	XSON6	DY XX	5000 PCS/reel	25000 PCS/box	Dimensions of plastic enclosure: 1.0mm×1.0mm Pin spacing: 0.35mm

Note 1: “XX” refers to variable content, meaning year and package batch serial number.

Note 2: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram

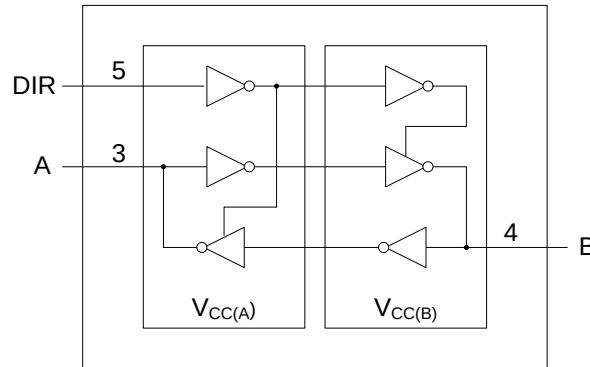


Figure 1. Logic diagram

2.2、Pin Configurations

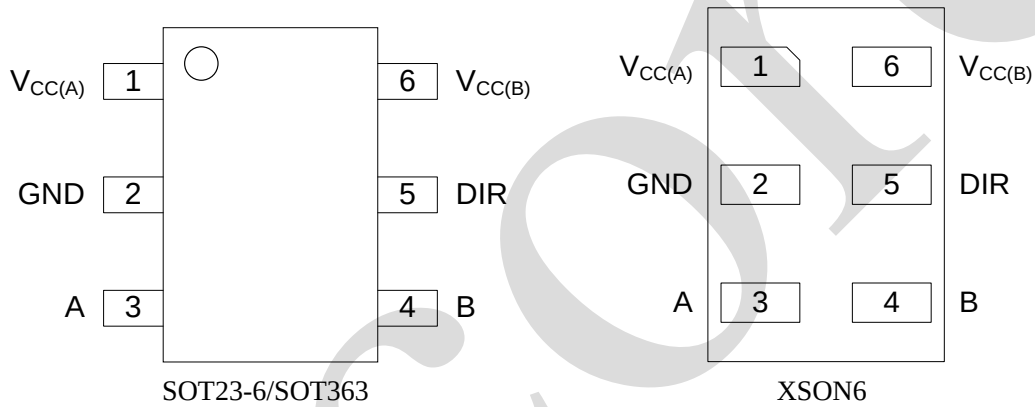


Figure 2. Pin configurations

2.3、Pin Description

Pin No.	Pin Name	Description
1	V _{CC(A)}	supply voltage port A and DIR
2	GND	ground (0V)
3	A	data input or output
4	B	data input or output
5	DIR	direction control
6	V _{CC(B)}	supply voltage port B



2.4、Function Table

H=HIGH voltage level; L=LOW voltage level; X=don't care; Z=high-impedance OFF-state.

Supply voltage	Input	Input/output ^[1]	
$V_{CC(A)}, V_{CC(B)}$	DIR ^[2]	A	B
0.8V to 3.6V	L	A=B	input
0.8V to 3.6V	H	input	B=A
GND ^[3]	X	Z	Z

Note:

[1] The input circuit of the data I/O is always active.

[2] The DIR input circuit is referenced to $V_{CC(A)}$.

[3] If at least one of $V_{CC(A)}$ or $V_{CC(B)}$ is at GND level, the device goes into suspend mode.

3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Characteristic	Symbol	Conditions	Min.	Max.	Unit
Supply Voltage A	$V_{CC(A)}$	-	-0.5	+4.6	V
Supply Voltage B	$V_{CC(B)}$	-	-0.5	+4.6	V
input clamping current	I_{IK}	$V_I < 0V$	-50	-	mA
Input Voltage	V_I	-	-0.5	+4.6	V
output clamping current	I_{OK}	$V_O < 0V$	-50	-	mA
output voltage	V_O	Active mode	-0.5	$V_{CCO}+0.5$	V
		Suspend or 3-state mode	-0.5	+4.6	V
output current	I_O	$V_O=0V$ to V_{CCO}	-	± 50	mA
supply current	I_{CC}	$I_{CC(A)}$ or $I_{CC(B)}$	-	100	mA
ground current	I_{GND}	-	-100	-	mA
Storage Temperature	T_{stg}	-	-65	+150	°C
total power dissipation	P_{tot}	-	-	250	mW
Soldering Temperature	T_L	10s	260		°C

3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage A	$V_{CC(A)}$	-	0.8	-	3.6	V
supply voltage B	$V_{CC(B)}$	-	0.8	-	3.6	V
input voltage	V_I	-	0	-	3.6	V
output voltage	V_O	Active mode	0	-	V_{CCO}	V
		Suspend or 3-state mode	0	-	3.6	V
ambient temperature	T_{amb}	-	-40	-	+125	°C



3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb}=25^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified)^[1]

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
HIGH-level output voltage	V_{OH}	$V_I=V_{IH}$ or V_{IL} ; $I_O=-1.5\text{mA}$; $V_{CC(A)}=V_{CC(B)}=0.8\text{V}$	-	0.69	-	V
LOW-level output voltage	V_{OL}	$V_I=V_{IH}$ or V_{IL} ; $I_O=1.5\text{mA}$; $V_{CC(A)}=V_{CC(B)}=0.8\text{V}$	-	0.07	-	V
input leakage current	I_I	DIR input; $V_I=0\text{V}$ or 3.6V ; $V_{CC(A)}=V_{CC(B)}=0.8\text{V}$ to 3.6V	-	-	± 1	μA
OFF-state output current	I_{OZ}	A or B port; $V_O=0\text{V}$ or V_{CCO} ; $V_{CC(A)}=V_{CC(B)}=0.8\text{V}$ to 3.6V ^[2]	-	-	± 2.5	μA
power-off current leakage	I_{OFF}	A port; V_I or $V_O=0\text{V}$ to 3.6V ; $V_{CC(A)}=0\text{V}$; $V_{CC(B)}=0.8\text{V}$ to 3.6V	-	-	± 1	μA
		B port; V_I or $V_O=0\text{V}$ to 3.6V ; $V_{CC(B)}=0\text{V}$; $V_{CC(A)}=0.8\text{V}$ to 3.6V	-	-	± 1	μA

Note:

[1] V_{CCO} is the supply voltage associated with the output port.

[2] For I/O ports, the parameter I_{OZ} includes the input leakage current.

3.3.2、DC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified)^{[1][2]}

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	data input	$V_{CCI}=0.8\text{V}$	$0.70V_{CCI}$	-	V
			$V_{CCI}=1.1\text{V}$ to 1.95V	$0.65V_{CCI}$	-	V
			$V_{CCI}=2.3\text{V}$ to 2.7V	1.6	-	V
			$V_{CCI}=3.0\text{V}$ to 3.6V	2	-	V
		DIR input	$V_{CC(A)}=0.8\text{V}$	$0.70V_{CC(A)}$	-	V
			$V_{CC(A)}=1.1\text{V}$ to 1.95V	$0.65V_{CC(A)}$	-	V
			$V_{CC(A)}=2.3\text{V}$ to 2.7V	1.6	-	V
			$V_{CC(A)}=3.0\text{V}$ to 3.6V	2	-	V
LOW-level input voltage	V_{IL}	data input	$V_{CCI}=0.8\text{V}$	-	$0.30V_{CCI}$	V
			$V_{CCI}=1.1\text{V}$ to 1.95V	-	$0.35V_{CCI}$	V
			$V_{CCI}=2.3\text{V}$ to 2.7V	-	0.7	V
			$V_{CCI}=3.0\text{V}$ to 3.6V	-	0.9	V
		DIR input	$V_{CC(A)}=0.8\text{V}$	-	$0.30V_{CC(A)}$	V
			$V_{CC(A)}=1.1\text{V}$ to 1.95V	-	$0.35V_{CC(A)}$	V
			$V_{CC(A)}=2.3\text{V}$ to 2.7V	-	0.7	V
			$V_{CC(A)}=3.0\text{V}$ to 3.6V	-	0.9	V
HIGH-level output voltage	V_{OH}	$V_I=V_{IH}$ or V_{IL}	$I_O=-100\mu\text{A}$; $V_{CC(A)}=V_{CC(B)}=0.8\text{V}$ to 3.6V	$V_{CCO}-0.1$	-	V
			$I_O=-3\text{mA}$; $V_{CC(A)}=V_{CC(B)}=1.1\text{V}$	0.85	-	V
			$I_O=-6\text{mA}$; $V_{CC(A)}=V_{CC(B)}=1.4\text{V}$	1.05	-	V



			$I_O = -8\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 1.65\text{ V}$	1.2	-	-	V
			$I_O = -9\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 2.3\text{ V}$	1.75	-	-	V
			$I_O = -12\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 3.0\text{ V}$	2.3	-	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH}$ or V_{IL}	$I_O = 100\text{ }\mu\text{A};$ $V_{CC(A)} = V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}$	-	-	0.1	V
			$I_O = 3\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 1.1\text{ V}$	-	-	0.25	V
			$I_O = 6\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 1.4\text{ V}$	-	-	0.35	V
			$I_O = 8\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 1.65\text{ V}$	-	-	0.45	V
			$I_O = 9\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 2.3\text{ V}$	-	-	0.55	V
			$I_O = 12\text{ mA};$ $V_{CC(A)} = V_{CC(B)} = 3.0\text{ V}$	-	-	0.7	V
input leakage current	I_I	DIR input; $V_I = 0\text{ V or } 3.6\text{ V};$ $V_{CC(A)} = V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}$		-	-	± 1	μA
OFF-state output current	I_{OZ}	A or B port; $V_O = 0\text{ V or } V_{CCO};$ $V_{CC(A)} = V_{CC(B)} = 3.6\text{ V}^{[3]}$		-	-	± 5	μA
power-off leakage current	I_{OFF}	A port; V_I or $V_O = 0\text{ V to } 3.6\text{ V};$ $V_{CC(A)} = 0\text{ V}; V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}$		-	-	± 5	μA
		B port; V_I or $V_O = 0\text{ V to } 3.6\text{ V};$ $V_{CC(B)} = 0\text{ V}; V_{CC(A)} = 0.8\text{ V to } 3.6\text{ V}$		-	-	± 5	μA
supply current	I_{CC}	A port; $V_I = 0\text{ V or } V_{CCI};$ $I_O = 0\text{ A}$	$V_{CC(A)} = 0.8\text{ V to } 3.6\text{ V};$ $V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}$	-	-	8	μA
			$V_{CC(A)} = 3.6\text{ V}; V_{CC(B)} = 0\text{ V}$	-	-	8	μA
			$V_{CC(A)} = 0\text{ V}; V_{CC(B)} = 3.6\text{ V}$	-2	-	-	μA
		B port; $V_I = 0\text{ V or } V_{CCI};$ $I_O = 0\text{ A}$	$V_{CC(A)} = 0.8\text{ V to } 3.6\text{ V};$ $V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}$	-	-	8	μA
			$V_{CC(A)} = 3.6\text{ V}; V_{CC(B)} = 0\text{ V}$	-2	-	-	μA
			$V_{CC(A)} = 0\text{ V}; V_{CC(B)} = 3.6\text{ V}$	-	-	8	μA
		A plus B port ($I_{CC(A)} + I_{CC(B)}$); $I_O = 0\text{ A}; V_I = 0\text{ V or } V_{CCI};$ $V_{CC(A)} = 0.8\text{ V to } 3.6\text{ V};$ $V_{CC(B)} = 0.8\text{ V to } 3.6\text{ V}^{[1]}$		-	-	16	μA

Note:

[1] V_{CCO} is the supply voltage associated with the output port.[2] V_{CCI} is the supply voltage associated with the data input port.



[3] For I/O ports, the parameter I_{OZ} includes the input leakage current.

3.3.3、DC Characteristics 3

($T_{amb}=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified) ^{[1][2]}

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	data input	$V_{CCI}=0.8\text{V}$	$0.70V_{CCI}$	-	-	V
			$V_{CCI}=1.1\text{V to }1.95\text{V}$	$0.65V_{CCI}$	-	-	V
			$V_{CCI}=2.3\text{V to }2.7\text{V}$	1.6	-	-	V
			$V_{CCI}=3.0\text{V to }3.6\text{V}$	2	-	-	V
		DIR input	$V_{CC(A)}=0.8\text{V}$	$0.70V_{CC(A)}$	-	-	V
			$V_{CC(A)}=1.1\text{V to }1.95\text{V}$	$0.65V_{CC(A)}$	-	-	V
			$V_{CC(A)}=2.3\text{V to }2.7\text{V}$	1.6	-	-	V
			$V_{CC(A)}=3.0\text{V to }3.6\text{V}$	2	-	-	V
LOW-level input voltage	V_{IL}	data input	$V_{CCI}=0.8\text{V}$	-	-	$0.30V_{CCI}$	V
			$V_{CCI}=1.1\text{V to }1.95\text{V}$	-	-	$0.35V_{CCI}$	V
			$V_{CCI}=2.3\text{V to }2.7\text{V}$	-	-	0.7	V
			$V_{CCI}=3.0\text{V to }3.6\text{V}$	-	-	0.9	V
		DIR input	$V_{CC(A)}=0.8\text{V}$	-	-	$0.30V_{CC(A)}$	V
			$V_{CC(A)}=1.1\text{V to }1.95\text{V}$	-	-	$0.35V_{CC(A)}$	V
			$V_{CC(A)}=2.3\text{V to }2.7\text{V}$	-	-	0.7	V
			$V_{CC(A)}=3.0\text{V to }3.6\text{V}$	-	-	0.9	V
HIGH-level output voltage	V_{OH}	$V_I=V_{IH}$ or V_{IL}	$I_O=-100\mu\text{A};$ $V_{CC(A)}=V_{CC(B)}=0.8\text{V to }3.6\text{V}$	$V_{CCO}-0.1$	-	-	V
			$I_O=-3\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.1\text{V}$	0.85	-	-	V
			$I_O=-6\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.4\text{V}$	1.05	-	-	V
			$I_O=-8\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.65\text{V}$	1.2	-	-	V
			$I_O=-9\text{mA};$ $V_{CC(A)}=V_{CC(B)}=2.3\text{V}$	1.75	-	-	V
			$I_O=-12\text{mA};$ $V_{CC(A)}=V_{CC(B)}=3.0\text{V}$	2.3	-	-	V
LOW-level output voltage	V_{OL}	$V_I=V_{IH}$ or V_{IL}	$I_O=100\mu\text{A};$ $V_{CC(A)}=V_{CC(B)}=0.8\text{V to }3.6\text{V}$	-	-	0.1	V
			$I_O=3\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.1\text{V}$	-	-	0.25	V
			$I_O=6\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.4\text{V}$	-	-	0.35	V
			$I_O=8\text{mA};$ $V_{CC(A)}=V_{CC(B)}=1.65\text{V}$	-	-	0.45	V
			$I_O=9\text{mA};$ $V_{CC(A)}=V_{CC(B)}=2.3\text{V}$	-	-	0.55	V
			$I_O=12\text{mA};$ $V_{CC(A)}=V_{CC(B)}=3.0\text{V}$	-	-	0.7	V



input leakage current	I_I	DIR input; $V_I=0V$ or $3.6V$; $V_{CC(A)}=V_{CC(B)}=0.8V$ to $3.6V$		-	-	± 1.5	μA
OFF-state output current	I_{OZ}	A or B port; $V_O=0V$ or V_{CCO} ; $V_{CC(A)}=V_{CC(B)}=3.6V^{[3]}$		-	-	± 7.5	μA
power-off leakage current	I_{OFF}	A port; V_I or $V_O=0V$ to $3.6V$; $V_{CC(A)}=0V$; $V_{CC(B)}=0.8V$ to $3.6V$		-	-	± 35	μA
		B port; V_I or $V_O=0V$ to $3.6V$; $V_{CC(B)}=0V$; $V_{CC(A)}=0.8V$ to $3.6V$		-	-	± 35	μA
supply current	I_{CC}	A port; $V_I=0V$ or V_{CCI} ; $I_O=0A$	$V_{CC(A)}=0.8V$ to $3.6V$; $V_{CC(B)}=0.8V$ to $3.6V$	-	-	12	μA
			$V_{CC(A)}=3.6V$; $V_{CC(B)}=0V$	-	-	12	μA
			$V_{CC(A)}=0V$; $V_{CC(B)}=3.6V$	-8	-	-	μA
		B port; $V_I=0V$ or V_{CCI} ; $I_O=0A$	$V_{CC(A)}=0.8V$ to $3.6V$; $V_{CC(B)}=0.8V$ to $3.6V$	-	-	12	μA
			$V_{CC(A)}=3.6V$; $V_{CC(B)}=0V$	-8	-	-	μA
			$V_{CC(A)}=0V$; $V_{CC(B)}=3.6V$	-	-	12	μA
		A plus B port ($I_{CC(A)}+I_{CC(B)}$); $I_O=0A$; $V_I=0V$ or V_{CCI} ; $V_{CC(A)}=0.8V$ to $3.6V$; $V_{CC(B)}=0.8V$ to $3.6V$		-	-	24	μA

Note:

[1] V_{CCO} is the supply voltage associated with the output port.

[2] V_{CCI} is the supply voltage associated with the data input port.

[3] For I/O ports, the parameter I_{OZ} includes the input leakage current.

3.3.4、AC Characteristics 1

($T_{amb}=25^{\circ}C$, $V_{CC(A)}=0.8V$, voltages are referenced to GND (ground=0V), unless otherwise specified)^{[1][2]}

Parameter	Symbol	Conditions	$V_{CC(B)}$						Unit
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
propagation delay	t_{PLH} , t_{PHL}	A to B	15.5	8.1	7.6	7.7	8.4	9.2	ns
		B to A	15.5	12.7	12.3	12.2	12.0	11.8	ns
disable time	t_{PLZ} , t_{PHZ}	DIR to A	12.2	12.2	12.2	12.2	12.2	12.2	ns
		DIR to B	11.7	7.9	7.6	8.2	8.7	10.2	ns
enable time	t_{PZL} , t_{PZH}	DIR to A	27.2	20.6	19.9	20.4	20.7	22.0	ns
		DIR to B	27.7	20.3	19.8	19.9	20.6	21.4	ns



3.3.5、AC Characteristics 2

($T_{amb}=25^{\circ}\text{C}$, $V_{CC(B)}=0.8\text{V}$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	$V_{CC(A)}$						Unit
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
propagation delay	t_{PLH} , t_{PHL}	A to B	15.5	12.7	12.3	12.2	12.0	11.8	ns
		B to A	15.5	8.1	7.6	7.7	8.4	9.2	ns
disable time	t_{PLZ} , t_{PHZ}	DIR to A	12.2	4.9	3.8	3.7	2.8	3.4	ns
		DIR to B	11.7	9.2	9.0	8.8	8.7	8.6	ns
enable time	t_{PZL} , t_{PZH}	DIR to A	27.2	17.3	16.6	16.5	17.1	17.8	ns
		DIR to B	27.7	17.6	16.1	15.9	14.8	15.2	ns

3.3.6、AC Characteristics 3

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	V _{CC(B)}										Unit
			1.2V±0.1V		1.5V±0.1V		1.8V±0.15V		2.5V±0.2V		3.3V±0.3V		
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
propagation delay	t _{PLH} , t _{PHL}	A to B											
		V _{CC(A)} =1.1V to 1.3V	-	9.0	-	6.8	-	6.1	-	5.7	-	6.1	ns
		V _{CC(A)} =1.4V to 1.6V	-	8.0	-	5.4	-	4.6	-	3.7	-	3.5	ns
		V _{CC(A)} =1.65V to 1.95V	-	7.7	-	5.1	-	4.3	-	3.4	-	3.1	ns
		V _{CC(A)} =2.3V to 2.7V	-	7.2	-	4.7	-	3.9	-	3.0	-	2.6	ns
		V _{CC(A)} =3.0V to 3.6V	-	7.1	-	4.5	-	3.7	-	2.8	-	2.4	ns
		B to A											
		V _{CC(A)} =1.1V to 1.3V	-	9.0	-	8.0	-	7.7	-	7.2	-	7.1	ns
		V _{CC(A)} =1.4V to 1.6V	-	6.8	-	5.4	-	5.1	-	4.7	-	4.5	ns
		V _{CC(A)} =1.65V to 1.95V	-	6.1	-	4.6	-	4.4	-	3.9	-	3.7	ns
		V _{CC(A)} =2.3V to 2.7V	-	5.7	-	3.8	-	3.4	-	3.0	-	2.8	ns
		V _{CC(A)} =3.0V to 3.6V	-	6.1	-	3.6	-	3.1	-	2.6	-	2.4	ns
disable time	t _{PLZ} , t _{PHZ}	DIR to A											
		V _{CC(A)} =1.1V to 1.3V	-	8.8	-	8.8	-	8.8	-	8.8	-	8.8	ns
		V _{CC(A)} =1.4V to 1.6V	-	6.3	-	6.3	-	6.3	-	6.3	-	6.3	ns
		V _{CC(A)} =1.65V to 1.95V	-	5.5	-	5.5	-	5.5	-	5.5	-	5.5	ns
		V _{CC(A)} =2.3V to 2.7V	-	4.2	-	4.2	-	4.2	-	4.2	-	4.2	ns
		V _{CC(A)} =3.0V to 3.6V	-	4.7	-	4.7	-	4.7	-	4.7	-	4.7	ns
		DIR to B											
		V _{CC(A)} =1.1V to 1.3V	-	8.4	-	6.7	-	6.9	-	6.2	-	7.2	ns
		V _{CC(A)} =1.4V to 1.6V	-	7.6	-	5.9	-	6.0	-	4.8	-	5.5	ns
		V _{CC(A)} =1.65V to 1.95V	-	7.7	-	5.7	-	5.8	-	4.5	-	5.2	ns
		V _{CC(A)} =2.3V to 2.7V	-	7.3	-	5.2	-	5.1	-	4.2	-	4.8	ns
		V _{CC(A)} =3.0V to 3.6V	-	7.2	-	5.5	-	5.5	-	4.1	-	4.7	ns
enable time	t _{PZL} , t _{PZH}	DIR to A											
		V _{CC(A)} =1.1V to 1.3V	-	17.4	-	14.7	-	14.6	-	13.4	-	14.3	ns
		V _{CC(A)} =1.4V to 1.6V	-	14.4	-	11.3	-	11.1	-	9.5	-	10.0	ns
		V _{CC(A)} =1.65V to 1.95V	-	13.8	-	10.3	-	10.2	-	8.4	-	8.9	ns
		V _{CC(A)} =2.3V to 2.7V	-	13.0	-	9.0	-	8.5	-	7.2	-	7.6	ns



	$V_{CC(A)}=3.0V$ to 3.6V	-	13.3	-	9.1	-	8.6	-	6.7	-	7.1	ns
	DIR to B											
	$V_{CC(A)}=1.1V$ to 1.3V	-	17.8	-	15.6	-	14.9	-	14.5	-	14.9	ns
	$V_{CC(A)}=1.4V$ to 1.6V	-	14.3	-	11.7	-	10.9	-	10.0	-	9.8	ns
	$V_{CC(A)}=1.65V$ to 1.95V	-	13.2	-	10.6	-	9.8	-	8.9	-	8.6	ns
	$V_{CC(A)}=2.3V$ to 2.7V	-	11.4	-	8.9	-	8.1	-	7.2	-	6.8	ns
	$V_{CC(A)}=3.0V$ to 3.6V	-	11.8	-	9.2	-	8.4	-	7.5	-	7.1	ns

3.3.7、AC Characteristics 4

($T_{amb}=-40^{\circ}C$ to $+125^{\circ}C$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	V _{CC(B)}										Unit	
			1.2V ±0.1V		1.5V ±0.1V		1.8V ±0.15V		2.5V ±0.2V		3.3V ±0.3V			
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
propagation delay	t _{PLH} , t _{PHL}	A to B												
		V _{CC(A)} =1.1V to 1.3V	-	9.9	-	7.5	-	6.8	-	6.3	-	6.8	ns	
		V _{CC(A)} =1.4V to 1.6V	-	8.8	-	6.0	-	5.1	-	4.1	-	3.9	ns	
		V _{CC(A)} =1.65V to 1.95V	-	8.5	-	5.7	-	4.8	-	3.8	-	3.5	ns	
		V _{CC(A)} =2.3V to 2.7V	-	8.0	-	5.2	-	4.3	-	3.3	-	2.9	ns	
		V _{CC(A)} =3.0V to 3.6V	-	7.9	-	5.0	-	4.1	-	3.1	-	2.7	ns	
		B to A												
		V _{CC(A)} =1.1V to 1.3V	-	9.9	-	8.8	-	8.5	-	8.0	-	7.9	ns	
		V _{CC(A)} =1.4V to 1.6V	-	7.5	-	6.0	-	5.7	-	5.2	-	5.0	ns	
		V _{CC(A)} =1.65V to 1.95V	-	6.8	-	5.1	-	4.9	-	4.3	-	4.1	ns	
		V _{CC(A)} =2.3V to 2.7V	-	6.3	-	4.2	-	3.8	-	3.3	-	3.1	ns	
		V _{CC(A)} =3.0V to 3.6V	-	6.8	-	4.0	-	3.5	-	2.9	-	2.7	ns	
disable time	t _{PLZ} , t _{PHZ}	DIR to A												
		V _{CC(A)} =1.1V to 1.3V	-	9.7	-	9.7	-	9.7	-	9.7	-	9.7	ns	
		V _{CC(A)} =1.4V to 1.6V	-	7.0	-	7.0	-	7.0	-	7.0	-	7.0	ns	
		V _{CC(A)} =1.65V to 1.95V	-	6.1	-	6.1	-	6.1	-	6.1	-	6.1	ns	
		V _{CC(A)} =2.3V to 2.7V	-	4.7	-	4.7	-	4.7	-	4.7	-	4.7	ns	
		V _{CC(A)} =3.0V to 3.6V	-	5.2	-	5.2	-	5.2	-	5.2	-	5.2	ns	
		DIR to B												
		V _{CC(A)} =1.1V to 1.3V	-	9.2	-	7.4	-	7.6	-	6.9	-	8.0	ns	
		V _{CC(A)} =1.4V to 1.6V	-	8.3	-	6.5	-	6.6	-	5.3	-	6.1	ns	
		V _{CC(A)} =1.65V to 1.95V	-	8.5	-	6.3	-	6.4	-	5.0	-	5.8	ns	
		V _{CC(A)} =2.3V to 2.7V	-	8.0	-	5.8	-	5.7	-	4.7	-	5.3	ns	
		V _{CC(A)} =3.0V to 3.6V	-	7.9	-	6.1	-	6.1	-	4.6	-	5.2	ns	
enable time	t _{PZL} , t _{PZH}	DIR to A												
		V _{CC(A)} =1.1V to 1.3V	-	19.1	-	16.2	-	16.1	-	14.9	-	15.9	ns	
		V _{CC(A)} =1.4V to 1.6V	-	15.8	-	12.5	-	12.3	-	10.5	-	11.1	ns	
		V _{CC(A)} =1.65V to 1.95V	-	15.3	-	11.4	-	11.3	-	9.3	-	9.9	ns	
		V _{CC(A)} =2.3V to 2.7V	-	14.3	-	10.0	-	9.5	-	8.0	-	8.4	ns	
		V _{CC(A)} =3.0V to 3.6V	-	14.7	-	10.1	-	9.6	-	7.5	-	7.9	ns	
		DIR to B												
		V _{CC(A)} =1.1V to 1.3V	-	19.6	-	17.2	-	16.5	-	16.0	-	16.5	ns	



	$V_{CC(A)}=1.4V$ to $1.6V$	-	15.8	-	13.0	-	12.1	-	11.1	-	10.9	ns
	$V_{CC(A)}=1.65V$ to $1.95V$	-	14.6	-	11.8	-	10.9	-	9.9	-	9.6	ns
	$V_{CC(A)}=2.3V$ to $2.7V$	-	12.7	-	9.9	-	9.0	-	8.0	-	7.6	ns
	$V_{CC(A)}=3.0V$ to $3.6V$	-	13.1	-	10.2	-	9.3	-	8.3	-	7.9	ns

4、Testing Circuit

4.1、AC Testing Circuit

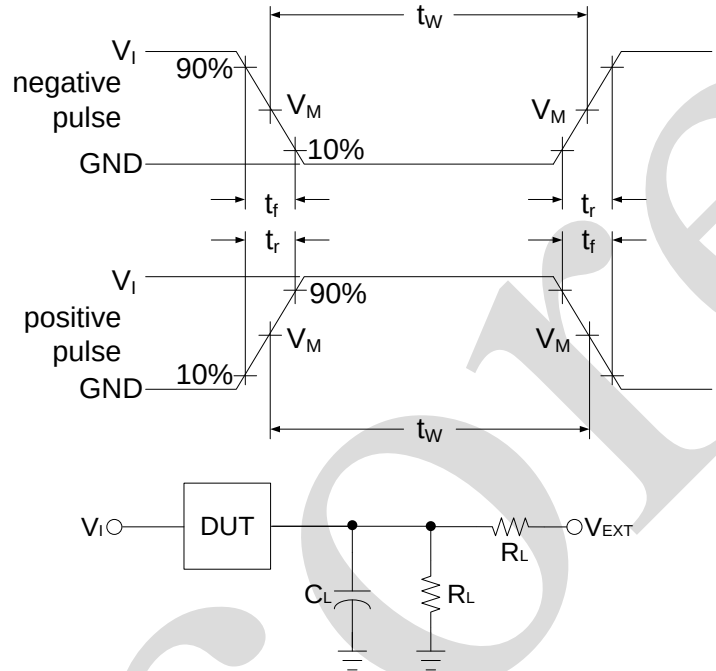


Figure 3. Test circuit for measuring switching times

C_L includes probe and jig capacitance.

R_L =Load resistance.

4.2、Test Data

Supply voltage	Input		Load		V_{EXT}		
$V_{CC(A)}, V_{CC(B)}$	$V_I^{[1]}$	$\Delta t/\Delta V^{[2]}$	C_L	R_L	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	$t_{PZL}, t_{PLZ}^{[3]}$
0.8V to 1.6V	V_{CCI}	$\leq 1.0ns/V$	15pF	2k Ω	open	GND	2 V_{CCO}
1.65V to 2.7V	V_{CCI}	$\leq 1.0ns/V$	15pF	2k Ω	open	GND	2 V_{CCO}
3.0V to 3.6V	V_{CCI}	$\leq 1.0ns/V$	15pF	2k Ω	open	GND	2 V_{CCO}

Note:

[1] V_{CCI} is the supply voltage associated with the data input port.

[2] $dV/dt \geq 1.0V/ns$

[3] V_{CCO} is the supply voltage associated with the output port.



4.3、AC Testing Waveforms

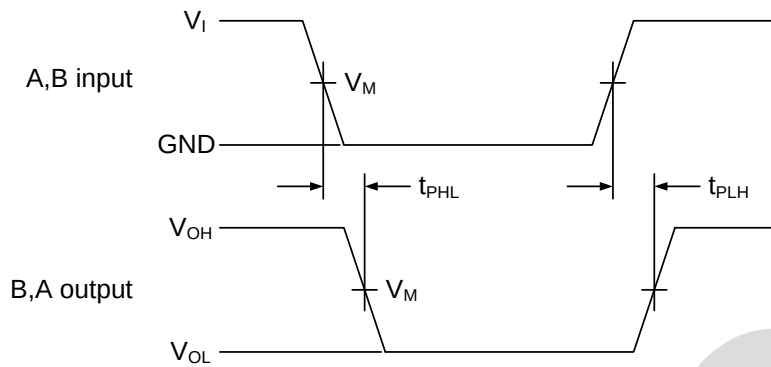


Figure 4. The data input (A, B) to output (B, A) propagation delay times

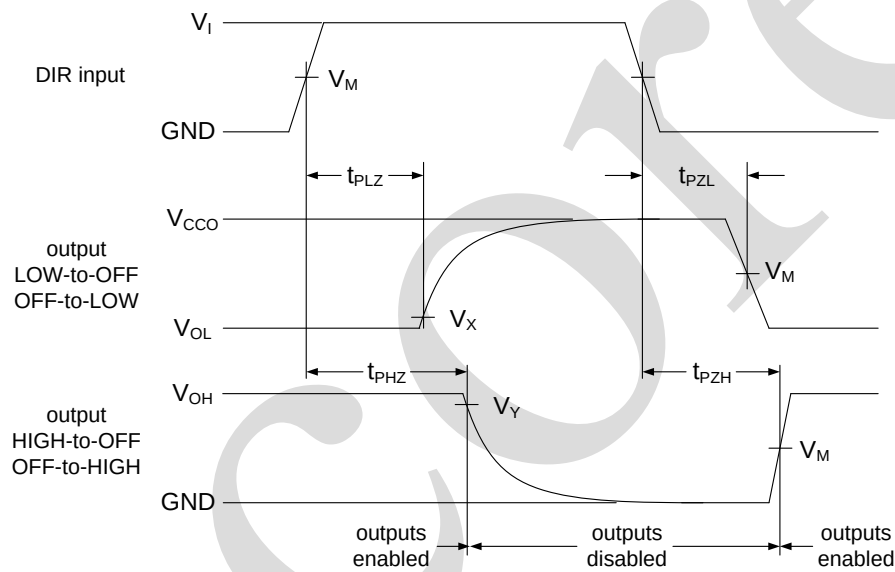


Figure 5. Enable and disable times

4.4、Measurement Points

Supply voltage	Input ^[1]	Output ^[2]		
$V_{CC(A)}, V_{CC(B)}$	V_M	V_M	V_X	V_Y
0.8V to 1.6V	$0.5V_{CCI}$	$0.5V_{CCO}$	$V_{OL}+0.1V$	$V_{OH}-0.1V$
1.65V to 2.7V	$0.5V_{CCI}$	$0.5V_{CCO}$	$V_{OL}+0.15V$	$V_{OH}-0.15V$
3.0V to 3.6V	$0.5V_{CCI}$	$0.5V_{CCO}$	$V_{OL}+0.3V$	$V_{OH}-0.3V$

Note:

[1] V_{CCI} is the supply voltage associated with the data input port.

[2] V_{CCO} is the supply voltage associated with the output port.



5、Typical Application Circuit And Application Note

5.1、Unidirectional Logic Level-shifting Application

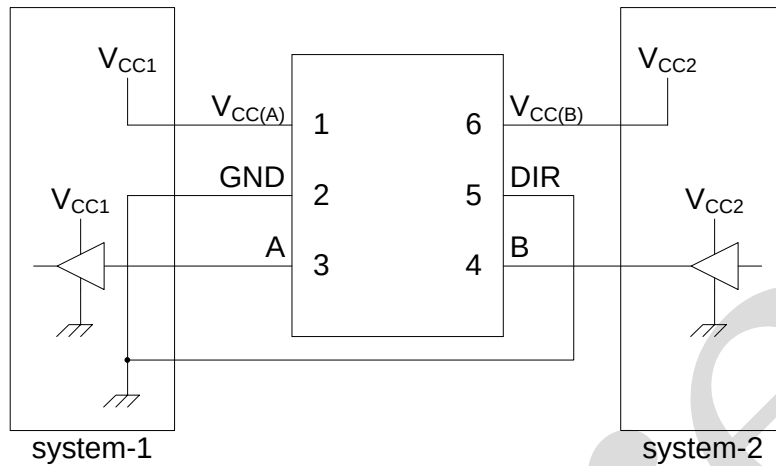


Figure 6. Unidirectional logic level-shifting application

5.2、Bidirectional logic level-shifting application




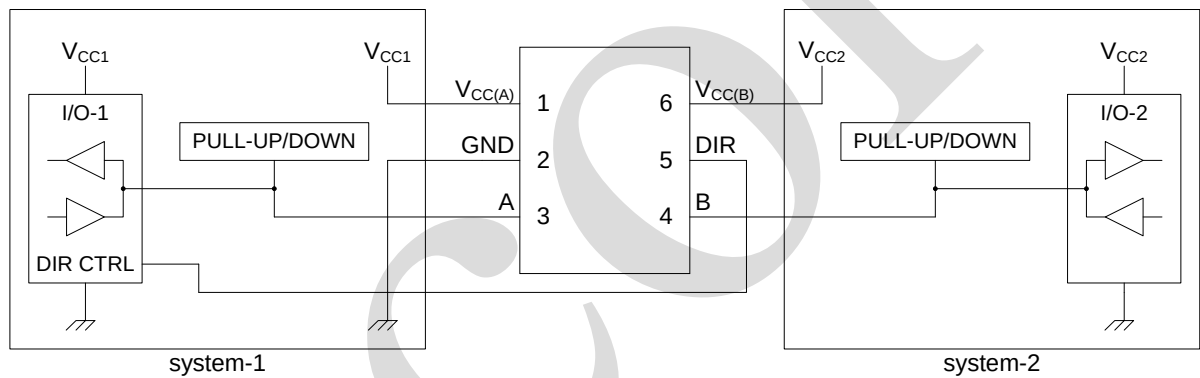


Figure 7. Bidirectional logic level-shifting application

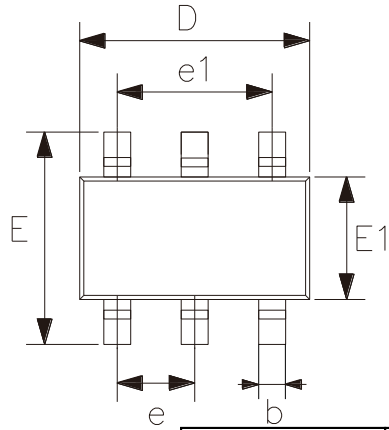

6、Package Information




6.1、SOT23-6

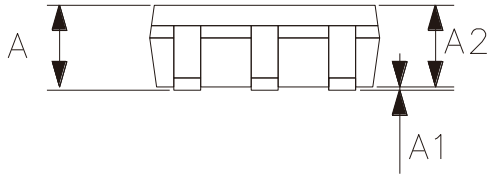

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	—	1.25
A1	0.00	0.12
A2	1.00	1.20
b	0.30	0.50
c	0.10	0.20
D	2.82	3.02
E	2.60	3.00
E1	1.50	1.70
e	0.95	
e1	1.80	2.00
L	0.30	0.60
θ	0°	8°




6.2、SOT363

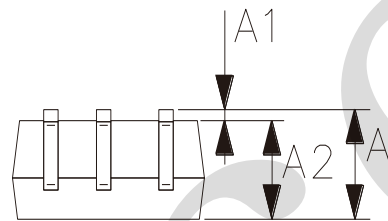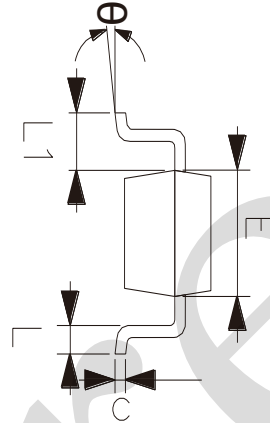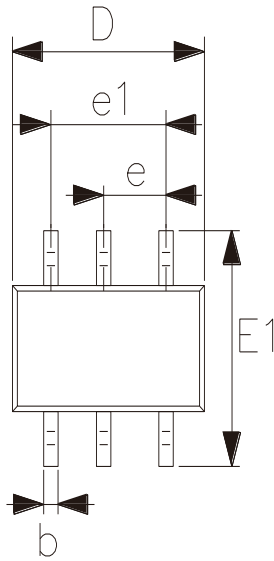

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
c	0.11	0.175
D	2.00	2.20
E1	2.15	2.45
E	1.15	1.35
e	0.65	
e1	1.20	1.40
L	0.26	0.46
L1	0.525	
θ	0°	8°



5.3、XSON6(1*1*0.45-0.35)

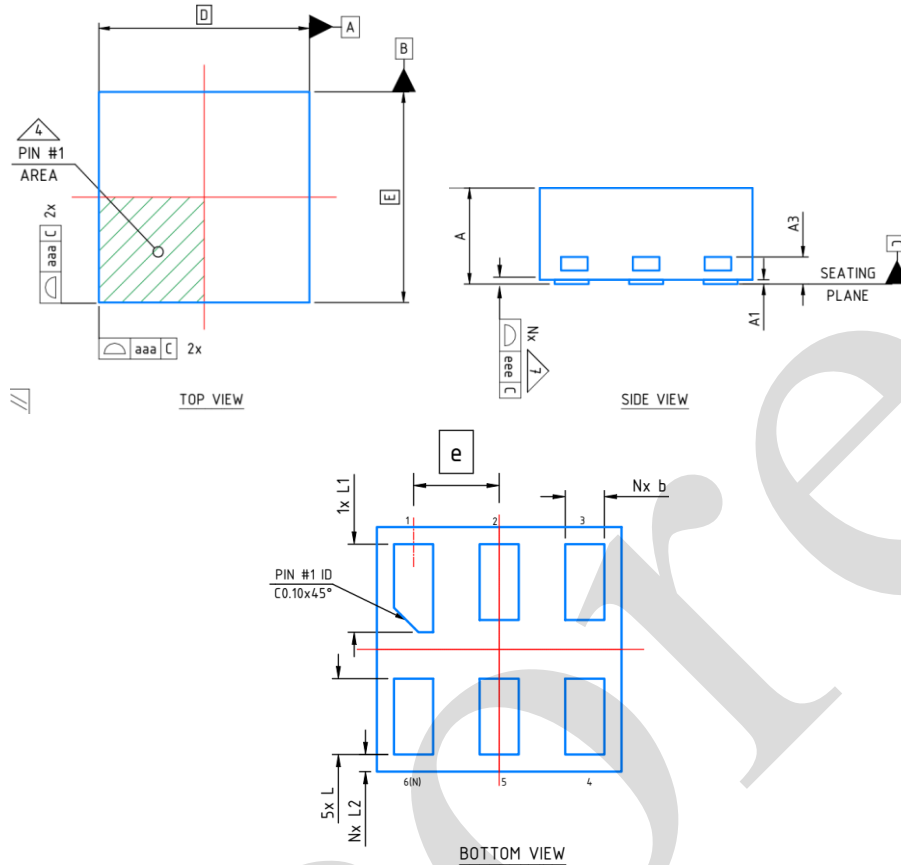

2023/12/A	Dimensions In Millimeters	
Symbol	Min	Max
A	0.41	0.50
A1	0.00	0.05
A3	0.127	
b	0.11	0.21
D	1.00	
E	1.00	
e	0.35	
L	0.26	0.36
L1	0.31	0.41
L2	0.02	0.12



7、Statements And Notes

7.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

7.2、Notes

We Recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials form i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.