



L9110S

H-Bridge DC Motor Driver

Product Specification

Specification Revision History:

Version	Date	Description
2018-09-A1	2018-09	New
2025-01-B1	2025-01	Update the template; modify the content



Contents

1、General Description.....	3
2、Block Diagram And Pin Description	4
2.1、Block Diagram	4
2.2、Pin Configurations.....	4
2.3、Pin Description.....	5
2.4、Function Description	5
3、Electrical Parameter	6
3.1、Absolute Maximum Ratings.....	6
3.2、Recommended Operating Conditions.....	6
3.3、Electrical Characteristics.....	6
4、Typical Application Circuit And Application Note.....	7
5、Package Information	8
5.1、SOP8	8
5.2、DFN8.....	9
6、Statements And Notes	10
6.1、The name and content of Hazardous substances or Elements in the product.....	10
6.2、Notes	10



1、General Description

The L9110S provides an integrated motor driver solution for consumer products, toys ,and other low-voltage or battery-powered motion control applications. The output driver block consists of N-channel power MOSFET's configured as an H-bridge to drive the motor winding.

Features:

- H-bridge motor driver
- Low standby current
- Typical power supply: 5V
- 400mA driver current @VDD1=VDD2=4.5V
- Drives a DC motor or other loads
- Package:SOP8/DFN8

Ordering Information:

Tube packing specifications:

Part number	Packaging form	Marking code	Tube quantity	Boxed tube quantity	Boxed quantity	Notes
L9110S	SOP8	L9110S	100 PCS/tube	100 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 4.9mm×3.9mm Pin spacing:1.27mm

Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
L9110S	SOP8	L9110S	4000PCS/reel	8000PCS/box	Dimensions of plastic enclosure: 4.9mm×3.9mm Pin spacing:1.27mm
L9110SXA8.TR	DFN8	L9110S	3000PCS/reel	30000PCS/box	Dimensions of plastic enclosure: 3.0mm×3.0mm Pin spacing:0.65mm

Note: If the physical information is inconsistent with the ordering information,please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram

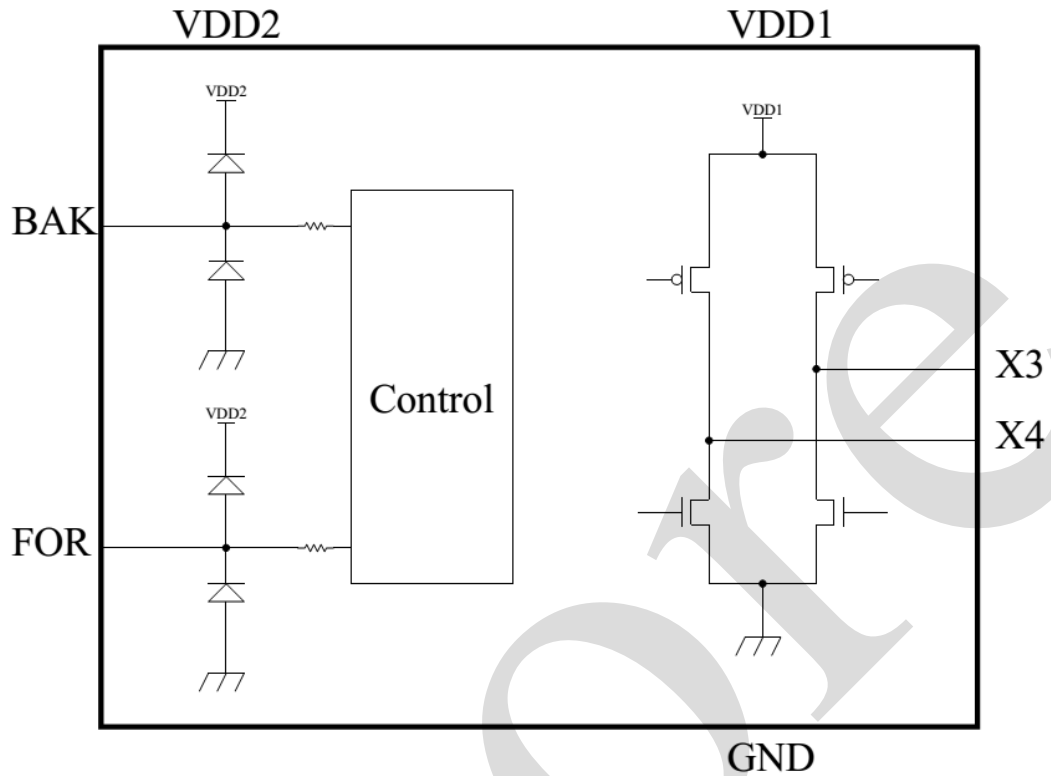


Figure 1 .L9110S Block Diagram

2.2、Pin Configurations

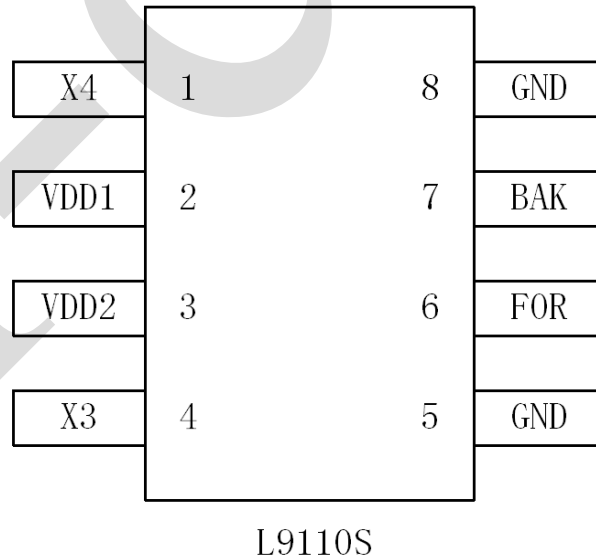


Figure 2 .L9110S Pin Configurations
(PIN5 and PIN8 must be connected externally to GND)



2.3、Pin Description

Pin No.	Pin Name	Description
1	X4	Forward output
2	VDD1	Motor power supply
3	VDD2	Logic Power supply
4	X3	Reverse output
5	GND	Device ground, Must be connected to ground
6	FOR	Forward input
7	BAK	Reverse input
8	GND	Device ground, Must be connected to ground

2.4、Function Description

BAK and FOR is the motor steering control pins, X3 and X4 are the motor output drive pins, and the steering control function is realized by the level control of the BAK and FOR input pins. The following table shows the motor steering control logic truth table.

BAK	FOR	X3	X4	Function
0	0	Z	Z	Coast
0	1	0	1	Forward
1	0	1	0	Reverse
1	1	0	0	Brake

The waveform diagram:

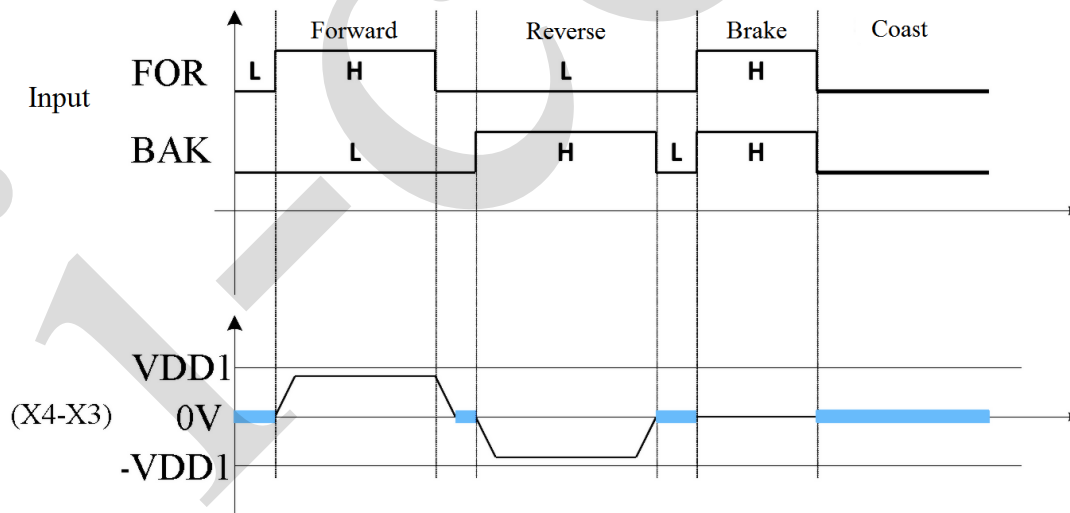


Figure 3 . waveform diagram



3、Electrical Parameter

3.1、Absolute Maximum Ratings

($T_{amb}=25^{\circ}\text{C}$, All voltage referenced to GND, unless otherwise specified)

Characteristic	Symbol	Conditions	Value	Unit
Power Supply Voltage	VDD	-	7.0	V
Input Voltage	VIN	-	-0.3~VDD+0.3	V
Junction temperature	TJ	-	150	$^{\circ}\text{C}$
Storage Temperature	Tstg	-	-65~150	$^{\circ}\text{C}$
Soldering Temperature	TL	10s	260	$^{\circ}\text{C}$

3.2、Recommended Operating Conditions

Characteristic	Symbol	Min.	Max.	Unit
Power Supply Voltage	VDD	2.0	5.5	V
Operating Temperature	T_{amb}	-40	85	$^{\circ}\text{C}$

3.3、Electrical Characteristics

($T_{amb}=25^{\circ}\text{C}$, VDD1=VDD2=4.5V, GND=0V, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply Voltage	VDD	VDD1 and VDD2	2	5	5.5	V
VDD1 standby current	ISTB1	FOR=BAK=L, VDD1=5V	-	0.5	7	μA
VDD2 standby current	ISTB2	FOR=BAK=L, VDD2=5V	-	0	7	μA
VDD1 Quiescent Current	IDD1	FOR=H or KAK=H, X3/X4 no load, VDD1=VDD2=5V	-	170	-	μA
VDD2 Quiescent Current	IDD2		-	100	-	μA
Input logic high voltage	VIH	-	2.2	-	-	V
Input logic low voltage	VIL	-	-	-	0.8	V
High level output voltage	VOH	IOH=150mA, test X3/X4	4.3	4.42	-	V
Low level output voltage	VOL	IOL=150mA, test X3/X4	-	0.1	0.2	V
HS + LS FE on-resistance	Ron	IO=±150mA, VDD1=4.5V	-	0.56	-	Ω



4、Typical Application Circuit And Application Note

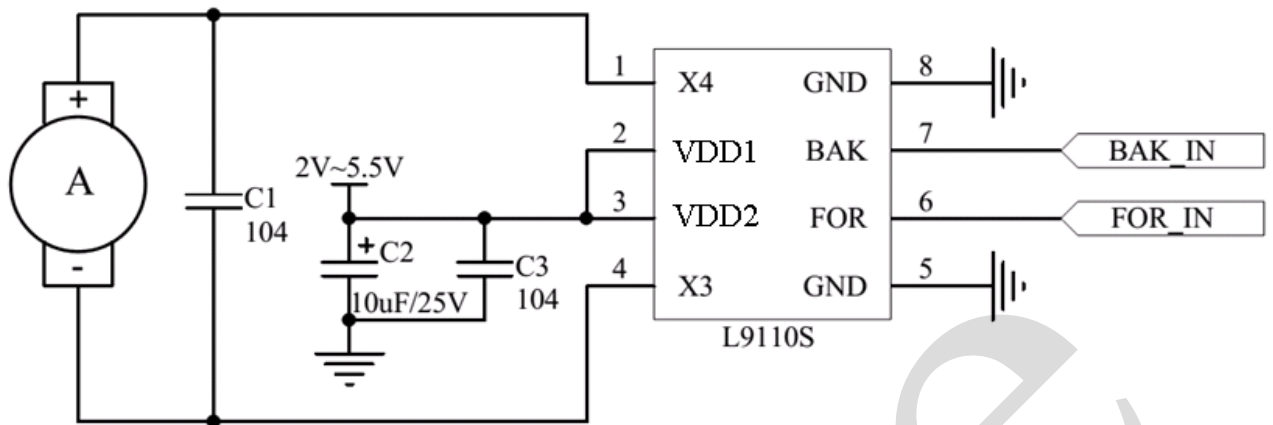


Figure 4. Typical Application Circuit




Note:

1. Capacitors must be added close to the power supply of the chip, otherwise the reliability of the chip will be seriously affected.
2. PIN5 and PIN8 must be connected externally to GND.



5、Package Information


5.1、SOP8

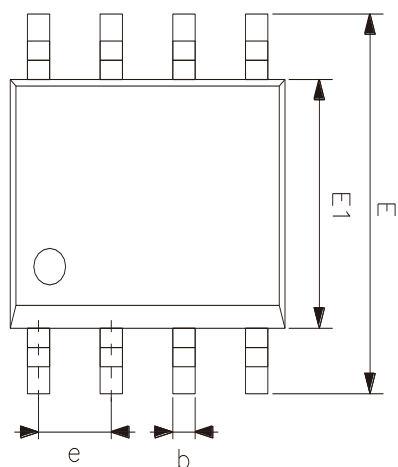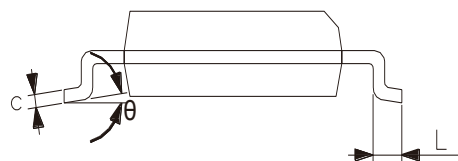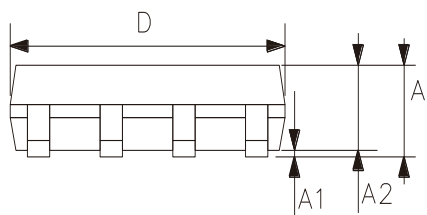

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	1.35	1.80
A1	0.05	0.25
A2	1.25	1.55
D	4.70	5.10
E	5.80	6.30
E1	3.70	4.10
b	0.306	0.51
c	0.19	0.25
e	1.27	
L	0.40	0.89
θ	0°	8°



5.2、DFN8

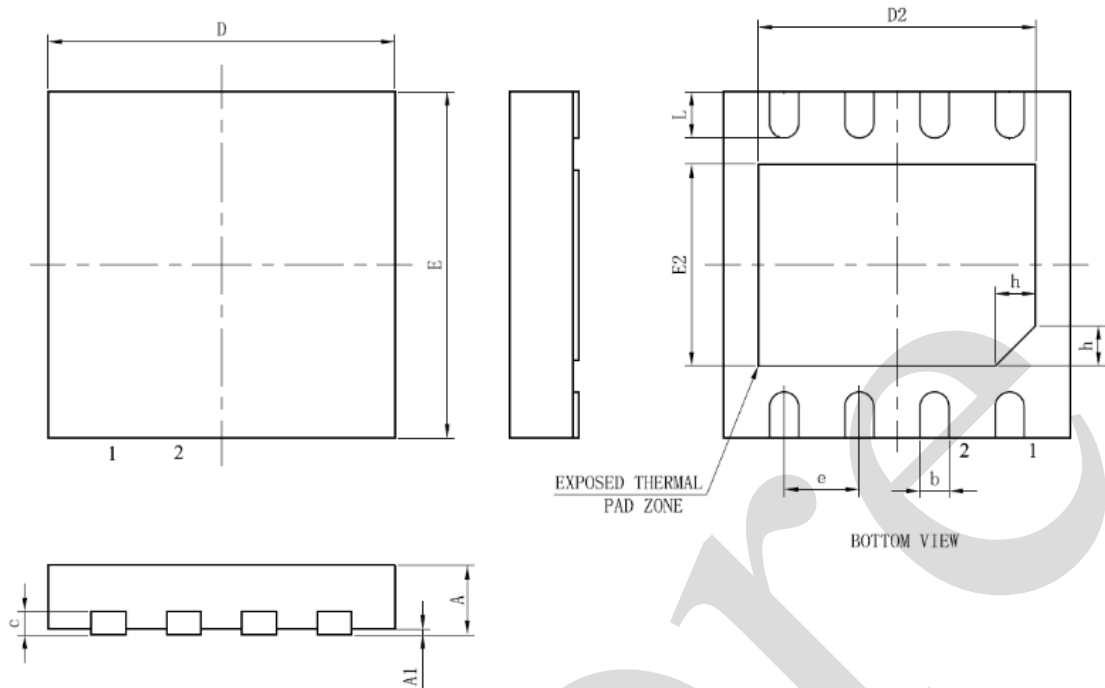

2023/12/A	Dimensions In Millimeters	
Symbol	Min	Max
A	0.70	0.80
A1	—	0.05
b	0.25	0.35
c	0.18	0.25
D	2.90	3.10
D2	2.40	2.60
E	2.90	3.10
E2	1.45	1.65
e	0.65	
L	0.30	0.50
h	0.20	0.30



6、Statements And Notes

6.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

6.2、Notes

We recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials from i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.